


HANKO

TECHNICAL DATA

Rated thermal power:	12 kW
Reduced thermal power:	3 kW
Heating surface (max.)*:	120 m ²
Consumption at rated power:	2,8 kg/h
Consumption at reduced power:	0,6 kg/h
CO emissions at rated power:	0,02 % (13% O ₂)
CO emissions at reduced power:	0,04 % (13% O ₂)
Weight:	120 kg
Tank capacity:	22 kg
Autonomy at rated power:	7,8 h
Autonomy at reduced power:	36 h
Performance at rated thermal power:	87 %
Performance at reduced thermal power:	92 %
Rated electrical power:	145 W
Electrical power when turned on:	375 W

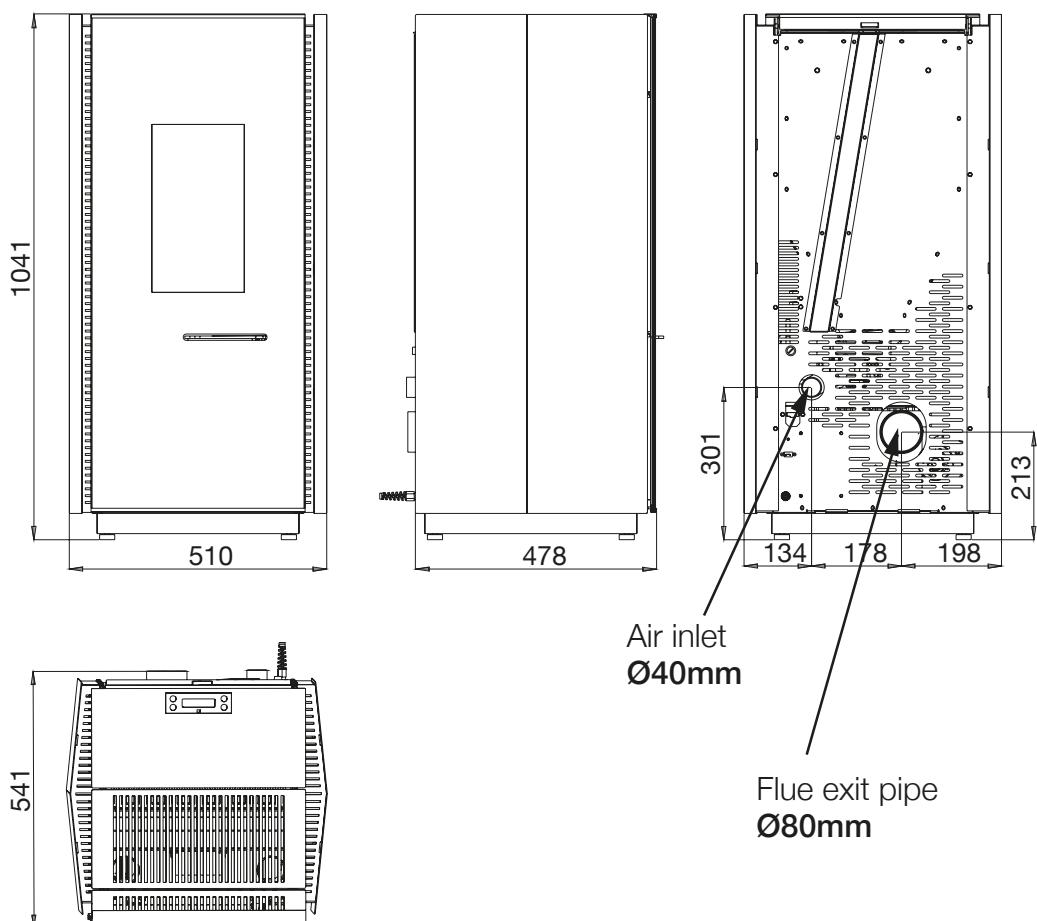

* Considering 40 W/m³ and a floor-ceiling distance of 2,5m. Building heating needs may change depending on insulation, type of building and climate zone.