
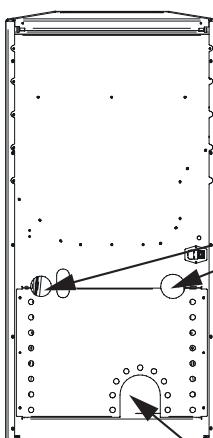



KOLARI 25 Hydro

TECHNICAL DATA

Rated thermal power:	25,25 kW
Rated water power:	20,25 kW
Reduced thermal power:	5,86 kW
Reduced water power:	4,6 kW
Heating surface (max.)*:	250 m ²
Consumption at rated power:	5,6 kg/h
Consumption at reduced power:	1,2 kg/h
CO emissions at rated power:	0,006 % (13% O ₂)
CO emissions at reduced power:	0,008 % (13% O ₂)
Weight:	250 kg
Tank capacity:	45 kg
Water capacity:	42 l
Autonomy at rated power:	8 h
Autonomy at reduced power:	37 h
Performance at rated thermal power:	93,1 %
Performance at reduced thermal power:	96,5 %
Electrical power (max.):	450 W

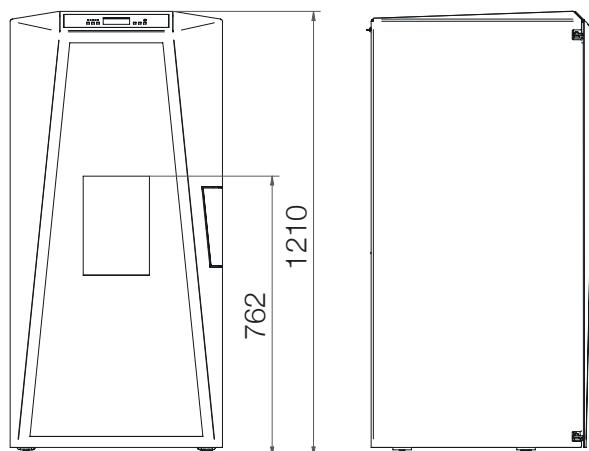

Water entrance and exit
Flue exit pipe

* Considering 40 W/m³ and a floor-ceiling distance of 2,5m. Building heating needs may change depending on insulation, type of building and climate zone.